



LED SLIM RECESSED PANEL LIGHT




LiFud
Driver In



Features & Benefits

- Ideal replacement for 600 x 600mm fluorescent fittings
- 595 x 595mm size for direct and quick retro fitting
- Output outperforms traditional fluorescents
- Even light distribution on walls and ceilings
- Aids LG3 and LG7 compliance
- Emergency and dimmable versions available (dimmable on request)
- Slim Profile
- Save 50-70% on energy costs
- Instant start, maintenance free
- Free from mercury and other hazardous materials
- Long Life – 30,000 hours
- Low heat output
- Approved by CE EMC

40W Photometric Data

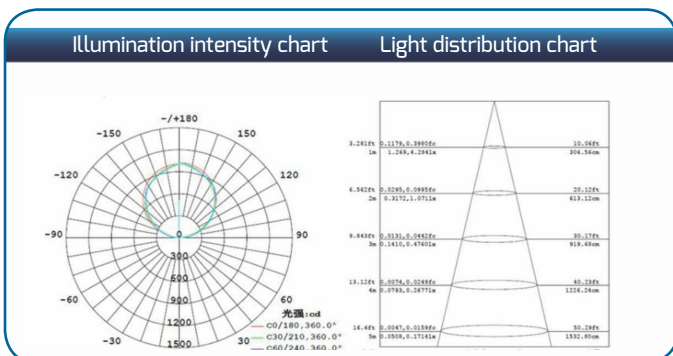

Accessories

Code	Description
LX5PPEX	Universal 3 hour emergency pack

40W 600 x 600mm LED Panel - White Trim

PRODUCT CODE: LXPL46004K

INPUT VOLTAGE	110-230V AC 50-60Hz
LED QTY	372PCS LED SMD Epistar
DRIVER	Includes non-dimmable driver
WATTAGE	40W
LUMEN	3600lm
COLOUR TEMP	4000K
CRI	>80
FINISH	White
SIZE	595 x 595 x 9mm
LIFETIME	30,000hrs
ALTERNATIVE TO	4 X 18W (72W) Fluorescent
ENERGY SAVING	50%

