

LED TRI-PROOF BLADE - 4ft-5ft



IP65 LED surface mounted fitting

APPLICATIONS

- Industrial areas
- Warehouses
- Garages and workshops

SPECIFICATION


- **60W**, 6070 lm, 104 l.lm
- **40W**, 4655 lm, 108 l.lm
- CRI > .8
- CCT 5000K
- Beam angle 120°
- SMD LED chips
- With 30cm mains cable

CONSTRUCTION


- White aluminium body
- Polycarbonate diffuser
- Polycarbonate end caps




(1) Drill 8mm holes. Insert the plastic screws into the holes.

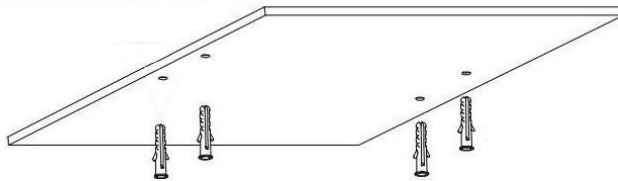



(2) Lock the clips unto the ceiling using the self-locking screws.

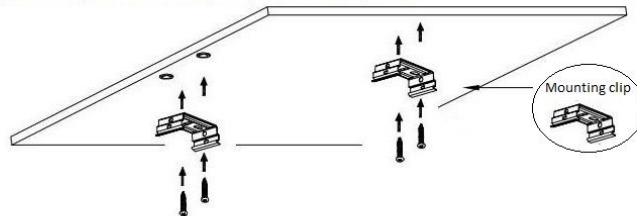

(3) Offer up the luminaire to the mounting clips and clip into place. Make sure clips have securely taken hold of luminaire at all points

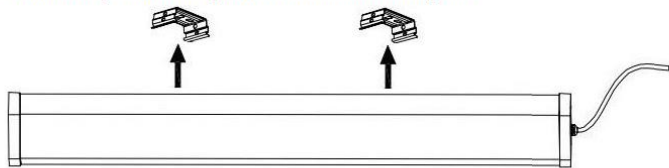

(4) Once secured connect to mains supply.

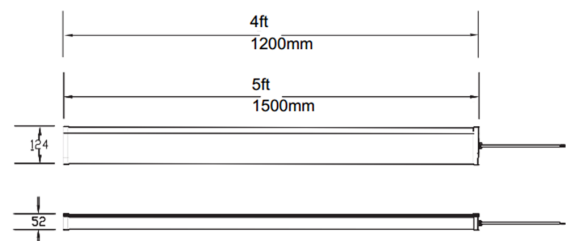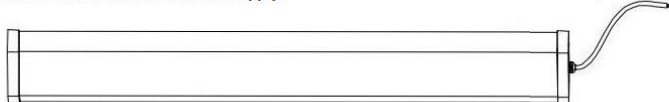

ORDER CODE	DESCRIPTION
LX-TRIBLD-60W	LED Tri-Proof Blade 60W 5000K
LX-TRIBLD-40W	LED Tri-Proof Blade 40W 5000K