


High Bay HALO



IP
66

5 Years
MANUFACTURER
WARRANTY

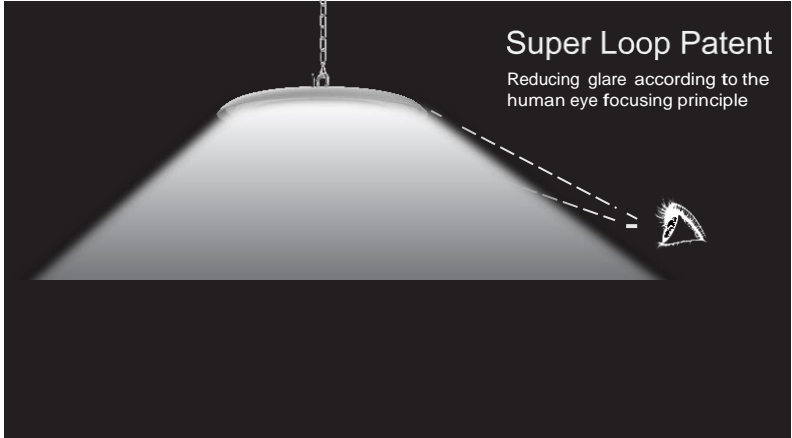

HALO 80W
12,800LM±5%
3.6kg±5%
∅380x63mm

HALO-100W
16,000LM±5%
3.8kg±5%
∅380x63mm

HALO-150W (stocked)
24,000LM±5%
3.8kg±5%
∅380x63mm

HALO 200W
32,000LM±5%
5.6kg±5%
∅500x68mm

HALO 240W (stocked)
38,400LM±5%
5.6kg±5%
∅500x68mm



IP66 & nano-coating,
minimize maintenance cost.

Specifications

WATTAGE	80/100/150/200/240W
DRIVER	MEANWELL
LAMP LUMINOUS FLUX	160LM/W±5%
LIGHT SOURCE	LUMILEDS
CRI	Ra>70/80
CCT	2700-6500K
RATED VOLTAGE	AC 100-240V 277V~, 50/60Hz
POWER FACTOR	>0.95
BEAM ANGLE	60°
IP GRADE	IP66
OPERATING TEMP	-40°C~55°C

► Compact curve surface design,
too smooth to gather dirt.

