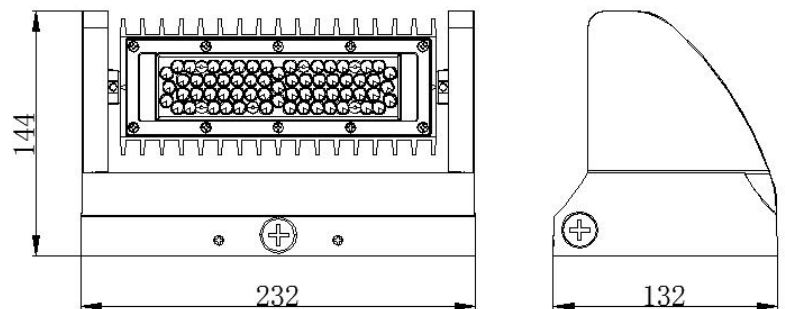


NAME: LED Rotatable Wall Light 40W

P/N : LX-RWL40W

**Advantage:**

- CE RoHS certificate
- IP65 Internal driver,
- Input voltage 100-240VAC
- No UV or IR in the beam
- Easy to install and operate
- Energy saving, long lifespan
- Instant start, NO humming
- Green and eco-friendly without mercury.



**Application:**

- ◆ Entrance lighting, courtyard lighting
- ◆ Industrial lighting, Outdoor landscape lighting
- ◆ Buildings, Hotels
- ◆ Wall lighting area and more

**Product Specifications**

Product name	LED Rotatable Wall Light 40W
Product No	LX-RWL40W
Dimension	232 x 132 x144 mm

**Technical Characteristic**

Color temperature	4000K
CRI	>70
Lumen	4800-5200LM
Lumen Efficacy	120-130LM/W
Input Power	40W
Viewing Angle	60°
Input Voltage	100-240VAC 50/60Hz
PF	>0.9
Waterproof Rating	IP65

**Materials**

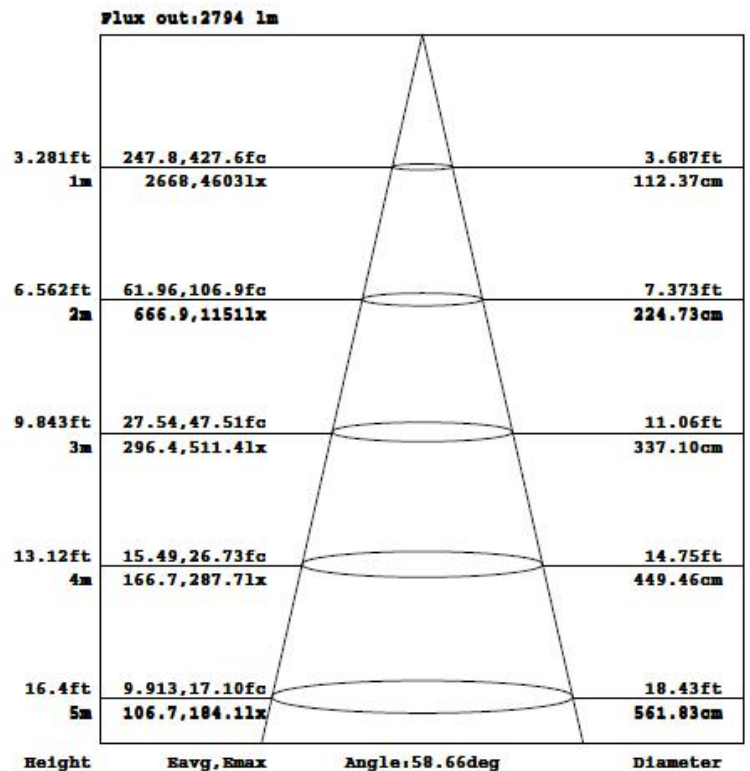
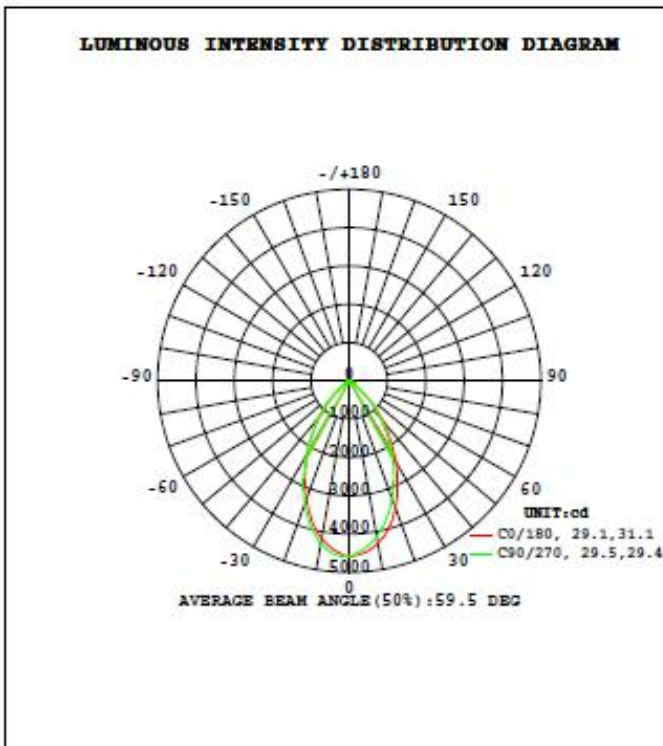
LED Brand	LUMILEDS
LED Type	LUXEON 3030 2D
LED QTY	49 PCS
Housing	Aluminum
Housing color	Black

**Others**

Operating Temperature	-20°C TO 45°C
Operating Humidity	20%-90% RH
Storage Temperature	-30°C TO 80°C
Storage Humidity	10%-95%
Application	Indoor / Outdoor
Safety Certification	CE RoHS
Warranty Time	5 Years

**Light Distribution Testing Parameters**

DATA OF LAMP		PHOTOMETRIC DATA <i>Eff: 122.70 lm/W</i>			
		<i>I</i> <sub>max</sub> (cd)	4697	S/MH(C0/180)	0.86
NOMINAL POWER(W)	40	LOR(%)	100.0	S/MH(C90/270)	0.87
RATED VOLTAGE(V)	240	TOTAL FLUX (lm)	5007.2	$\eta$ UP, DN(C0-180)	0.1, 50.5
NOMINAL FLUX (lm)	5007.2	CIE CLASS	DIRECT	$\eta$ UP, DN(C180-360)	0.1, 49.3
LAMPS INSIDE	1	$\eta$ up (%)	0.2	CIBSE SHR NOM	0.75
TEST VOLTAGE (V)	240.0	$\eta$ down (%)	99.8	CIBSE SHR MAX	0.95


**Package**
**Lamps Net Weight: 2.02kg / pcs**