

NAME: LED Rotatable Wall Light 80W (2x40W)

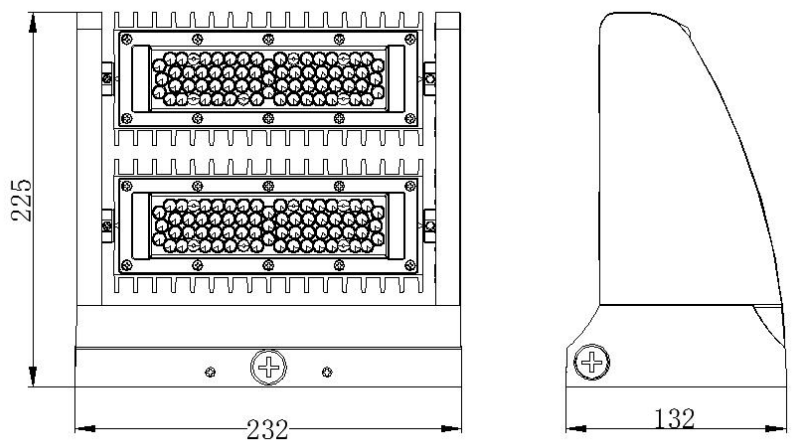
P/N : LX-RWL80W

Advantage:

- CE RoHS certificate
- IP65 Internal driver
- Input voltage 100-240VAC
- No UV or IR in the beam
- Easy to install and operate
- Energy saving, long lifespan
- Instant start, NO humming
- Green and eco-friendly without mercury

Application:

- ◆ Entrance lighting, Courtyard lighting
- ◆ Industrial lighting, Outdoor landscape lighting
- ◆ Buildings, Hotels
- ◆ Wall lighting area and more



Product Specifications

Product name	LED Rotatable Wall Light 80W (2x40W)
Product No	LX-RWL80W
Dimension	232 x 132 x 225 mm

Technical Characteristic

Color temperature	5000K
CRI	>70
Lumen	8800-10400LM
Lumen Efficacy	110-130LM/W
Input Power	80W
Viewing Angle	60°
Input Voltage	100-240VAC 50/60Hz
PF	>0.9
Waterproof Rating	IP65

Materials

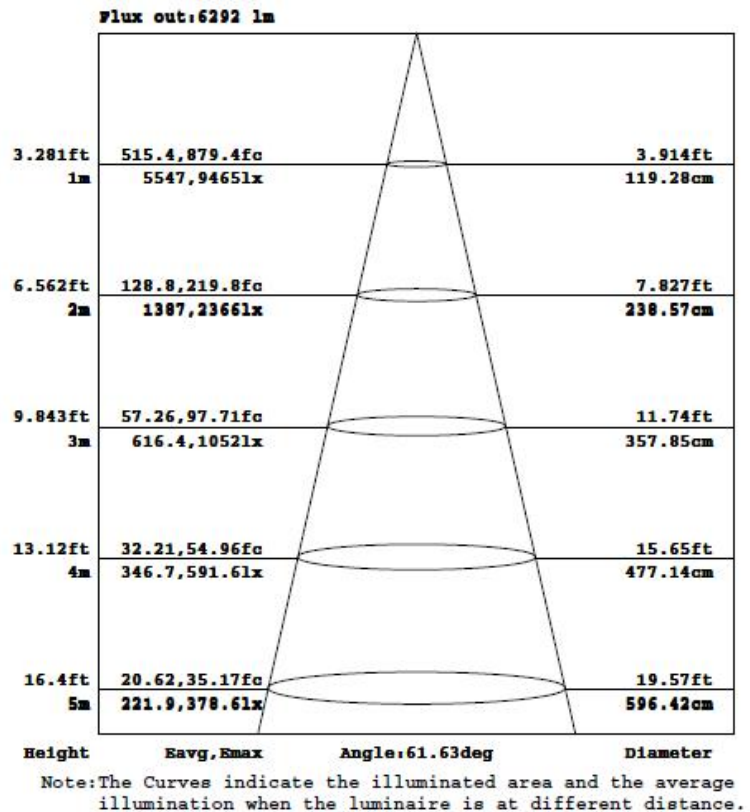
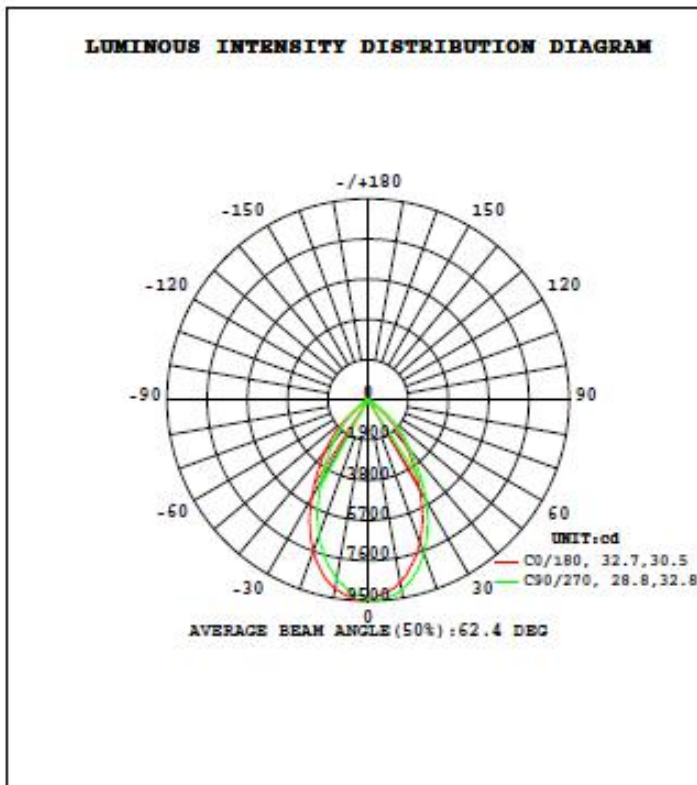
LED Brand	LUMILEDS
LED Type	LUXEON 3030 2D
LED QTY	98 PCS
Housing	Aluminum
Housing color	Black

Others

Operating Temperature	-20°C TO 45°C
Operating Humidity	20%-90% RH
Storage Temperature	-30°C TO 80°C
Storage Humidity	10%-95%
Application	Indoor / Outdoor
Safety Certification	CE RoHS
Warranty Time	5 Years

Light Distribution Testing Parameters

DATA OF LAMP		PHOTOMETRIC DATA Eff: 136.25 lm/W			
		I _{max} (cd)	9451	S/MH(C0/180)	0.96
NOMINAL POWER (W)	80	LOR (%)	100.0	S/MH(C90/270)	0.87
RATED VOLTAGE (V)	240	TOTAL FLUX (lm)	10786	η UP, DN(C0-180)	0.1, 52.6
NOMINAL FLUX (lm)	10786.2	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.1, 47.1
LAMPS INSIDE	1	η up (%)	0.2	CIBSE SHR NOM	0.75
TEST VOLTAGE (V)	240.0	η down (%)	99.8	CIBSE SHR MAX	0.95


Package
Lamps Net Weight: 3.12kg / pcs